




BOSCH

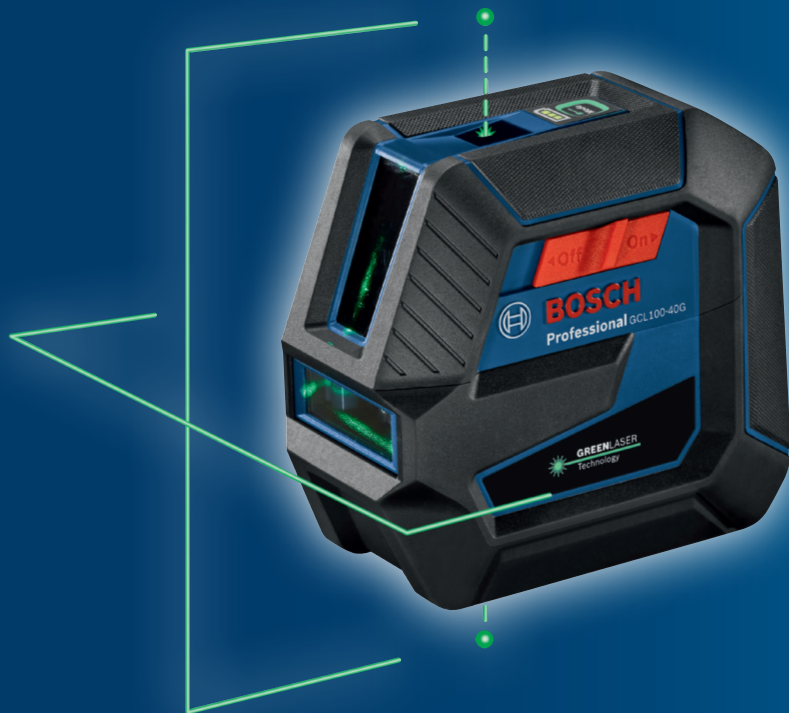

GCL100-40G

**Green-Beam Self-Leveling Cross-Line
Laser with Plumb Points**

Bright Green Beams
Visimax™ Technology



GREEN-BEAM SELF-LEVELING CROSS-LINE LASER WITH PLUMB POINTS

VISIMAX

GCL100-40G

EASY-TO-USE LINE LASER

Facilitates quick job set-up with a range up to 165 Ft. with vertical, horizontal and cross-line modes

SMART PENDULUM SYSTEM

Allows tool to self-level, and it indicates out-of-level condition

VERSATILE JOB LAYOUT

Lines can be projected separately or together for a variety of level and alignment applications

BRIGHT GREEN-BEAM LASER

Up to 4× brighter than standard red beams

BUILT-IN VISIMAX™ TECHNOLOGY

Monitors power consumption to maximize line visibility and extend battery life

PLUMB POINTS

Projects upward and downward green laser points for transferring applications with a range of up to 50 Ft.



EASY-TO-USE LASER SETUP MODES

Controls vertical, horizontal, cross-lines, and plumb points

SECURE LASER TRANSPORT

After switching off, pendulum is locked

JOBSITE TOUGH CONSTRUCTION

Withstands rainy or dusty jobsite conditions, and is IP64 rated



FULL RUBBER OVERMOLD HOUSING

Helps protect every major impact point, with a design similar to a roll cage

RM10 ROTATING MOUNT

Provides fast setup, extra-strong magnets, and fine adjustment rotation nob





Specifications	
Visible Line Range	100 ft.
Line Range with Optional Receiver	165 ft.
Point Range	50 ft.
Line Accuracy	1/8" at 30 ft.
Point Accuracy	9/32" at 30 ft.
Operating Temperature	14° F–22° F (-10° C–50° C)
Power Source	(4) AA Batteries
Mounting Thread	1/4"–20
IP Rating	IP 64
Drop Resistance Rating	1m
Dimensions	5"×2.5"×4.5"
Weight (Bare Tool)	1.28 lbs.

Includes	
GCL100-40G	Green-Beam Self-Leveling Cross-Line Laser with Plumb Points GCL100-40G , Rotating Mount RM10 , (4) AA Batteries, Hard Carry Case



Robert Bosch Tool Corporation

1800 W. Central Rd.
Mount Prospect, IL 60056
www.boschtools.com

2020-088